


## **ALLEY SECTION**

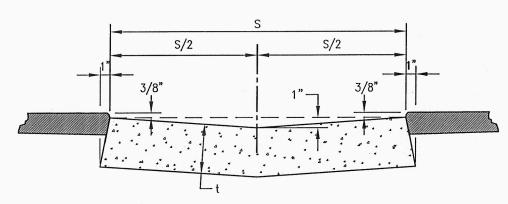

## CONCRETE GUTTER SECTION

ALLEY TYPES	W	S	t
RESIDENTIAL	20'	6'	0.67'
COMMERCIAL INDUSTRIAL	24'	6 <b>'</b>	0.67'
PARKING LOT	N.A.	3'	0.5'

## **NOTES:**

- 1. Construct minimum 0.25' over 0.5' A.B. \*
- 2. Concrete shall be of class 520-C-2500.
- 3. Construct 2" x 4" redwood header, both sides with 2" x 2" x 16" redwood stakes 6' 0.C.
- 4. Place transverse weakened-plane joints at 15' intervals.
- \* Note Actual required section shall be determined by an approved Soil Engineer.



No. 18542

CITY OF ORANGE

PUBLIC WORKS DEPARTMENT

STANDARD PLAN No.

TYPICAL ALLEY SECTION

113